

## A2553

# 8 Channel 32 V/3 A Full Floating Channel Board



## Features



- 8 independently controllable Low Voltage channels
- 0 ÷ 32 V Output Voltage / 3 A maximum current (60 W)
- Parallel channel customization (5 A, 100 W)
- D-Sub 8W8, DB37 connectors
- Individual remote sense lines (A2553A only)
- **Floating Type:** Individual Full Floating Channel
- Low ripple
- Under/over-voltage alert, overcurrent and max. voltage protection
- Interlock logic for unit enable
- Software Tool for easy channel management

## Description

The CAEN Mod A2553 is a single width board (5 TE wide) that houses 8 independent Low Voltage Individual Full Floating channels, compatible with the CAEN Universal Multichannel Power Supply System (SY4527, SY5527).

The A2553 is available in two different versions equipped with **D-Sub 8-pin** or with **DB37** connectors. Consult our **connectors reference page** for technical information.

**A2553 Individual Full Floating** channels allow on-detector grounding, reducing the noise level. The floating channels are insulated from each other up to  $\pm 500$  V. Each output channel is provided with individual remote sensing lines to compensate for the voltage drop over the connection cables.

The output voltage range is **0 ÷ 32 V**, with **1 mV** monitor resolution. The maximum output current is **3 A**, with **0.1 mA** monitor resolution. The maximum channel power is **60 W**.

Independently programmable for each channel:

|                              |                                |              |
|------------------------------|--------------------------------|--------------|
| <b>Output voltage:</b>       | 0 ÷ 32 V                       | Step: 1 mV   |
| <b>Current limit (Iset):</b> | 0 ÷ 3 A                        | Step: 0.1 mA |
| <b>V Ramp up/down:</b>       | 1 ÷ 500V/s                     | Step: 1 V/s  |
| <b>TRIP parameter:</b>       | 0 ÷ 999.9 s; 1000 s = Infinite | Step: 0.1 s  |

The A2553 can be optionally ordered with a parallel channel configuration, allowing channels to be paired (CH0-CH1, CH2-CH3, CH4-CH5, CH6-CH7).

When two channels are paralleled, the system automatically detects the new configuration, presenting it as a single channel with a maximum output current of 5 A and a total power of 100 W.

Boards manufactured without this option can be retrofitted.

Safety features include:

- **Overvoltage detection:** if a channel voltage exceeds the programmed Overvoltage threshold value (OVVThr), it is signaled to be in "overvoltage" and is switched off.
- **Undervoltage detection:** if a channel voltage decreases below the programmed undervoltage threshold (UNVThr), it is signaled to be in "undervoltage" and is switched off.
- **Overcurrent detection:** when a channel attempts to exceed the programmed current limit, it signals an "overcurrent" condition and enters TRIP status. The output voltage is adjusted to keep the current below the programmed limit for a programmable TRIP time, after which the channel is switched off. If TRIP is set to "constant current mode", the channel behaves as a current source.
- **A global enable/disable connector** allows to disable the channels and it is also possible, via front panel logic signals, to enable individually each channel (DB37 version only).

CAEN provides a complete software range to control, monitor and configure its Power Supply products.

- **GECO2020 GEneral Control Software**
- **CAEN HV Wrapper Library**
- **HiVoCS web tool**
- **OPC Server for CAEN Power Supplies**
- **EPICS Service**

These tools, which support the most used operating systems, ranging from low level libraries (**CAEN HV Wrapper Library**), to be used as a source for customer designed software, to the WEB interface (**HIVOCS**) available on each mainframe, up to the all-inclusive Control Software (**GECO2020**) with user friendly graphical interfaces, to meet any application needs.

Advanced control via OPC Server (**CAEN OPC Server**) and EPICS (**EPICS IOC**) is supported, to easily include CAEN power supplies within existing setups featuring such standards.

- **All tools are available for free download.**

## Universal Multichannel Power Supply Systems (Mainframes)

Universal Multichannel Power Supply Systems, or Mainframes, are modular systems designed to house and control High Voltage (HV) and Low Voltage (LV) boards, providing power for particle detectors and their associated electronics in standard 19" racks. CAEN offers four mainframe versions:

- **SY4527:** A large experimental system. This 19" wide / 8U high mainframe can house **up to 16 HV/LV boards**. It offers a power output from 600W up to a maximum of **4200W**, depending on installed Power Supply Units and display type. Local control is optionally available via a 10.4" or 5.7" LCD Touchscreen.
- **SY5527:** A more compact laboratory version. This 19" wide / 4U high mainframe can house **up to 6 HV/LV boards**. Its power output ranges from 600W up to a maximum of **1800W**, depending on Power Supply Units. Optional local control is available via a 5.7" LCD Touchscreen.
- **SY4527LC:** A cost-effective alternative with a shorter depth (~20cm compared to standard SYx527). This 19" wide / 8U high mainframe houses **up to 10 boards** and includes a **600W power supply**. It does not include an LCD display. It is fully compatible with SY4527 and SY5527 boards.
- **SY5527LC:** Also a cost-effective, shorter depth alternative (~20cm compared to standard SYx527). This 19" wide / 4U high mainframe houses **up to 4 boards** and includes a **400W power supply**. It does not include an LCD display. It is fully compatible with SY4527 and SY5527 boards.

All systems offer modular design for simplified upgrades and maintenance and can be controlled remotely via Ethernet.

## Technical Specifications

### Packaging

1 unit (5 TE) wide; 6U – High mechanics

### No. of Channels

8

### Polarity

Individual Full Floating ( $\pm 500\text{V}$  isolation)

### Output Voltage

0 ÷ 32 V

### Max Output Current

3 A

### Max Output Power (connector Output)

60 W

### Vset Resolution

1 mV

### Iset Resolution

0.1 mA

### Vmon Resolution

1 mV

### Imon Resolution

0.1 mA

### Ramp Up/Down

1-500 V/s (1 V/s step)

### Voltage Ripple (10Hz ÷ 20MHz)

Typ: < 4 mVpp  
Max: < 8 mVpp

### Accuracy\*

$\pm\%$  read value  $\pm\%$  FS

- $V_{out}/V_{mon} \pm 0.1\% \pm 50\text{ mV}$
- $V_{set}/V_{out} \pm 0.1\% \pm 50\text{ mV}$
- $I_{out}/I_{mon} \pm 1\% \pm 10\text{ mA}$
- $I_{set}/I_{out} \pm 1\% \pm 50\text{ mA}$

### Hardware OVV Protection

35 V typ

### Trip

0 to 999.9s; 1000s = Infinite; step 0.1s

### Stability

<5mV (Vset = 5V - No Load - one day after 1 hour warm up)

### Long Term Stability

<10mV (Vset = 5V - No Load - one week after 1 hour warm up)

### Temperature Coefficient

±100 ppm/°C

### Load regulation

< 0.05% (Vset = 5V, Iout from 0A to 10A, 1m AWG20 cable / 1m AWG20 sense wire)

### Operating temperature

0 ÷ 45°C

### Storage temperature

-10 ÷ 70°C

### Humidity

0 - 80% non condensing

### Altitude

2000m

### Safety Standard - ROHS - Halogen free

ROHS

### MTBF

Base: 120000 hours

### EMC qualification

CE Standards

## Ordering Options

| Code         | Description  |      |
|--------------|--|------|
| WA2553AXAAAA | A2553A - individual floating 8 ch 32 V/3 A (60 W) board - DB37 conn. | RoHS |
| WA2553XAAAAA | A2553 - individual floating 8 ch 32 V/3 A (60 W) board               | RoHS |
| WPERSXXA2553 | A2553 parallel channel customization                                 | RoHS |

## Related Products

### **SY5527LC**



Universal Multichannel Power Supply System Low Cost / 19"wide, 4U-high (4 slot)

---

### **SY5527**



Universal Multichannel Power Supply System / 19"wide, 4U-high (6 slot)

---


### **SY4527**



Universal Multichannel Power Supply System / 19"wide, 8U-high (16 slot)

---

### **SY4527LC**



Universal Multichannel Power Supply System Low Cost / 19"wide, 8U-high (10 slot)


---




A2553: 8 Channel 32 V/3 A Full Floating Channel Board, D-Sub 8W8 / DB37 connectors



DB37 connector. (Factory name: Amphenol D37S13A4GV00LF )



D-Sub 8W8 connector. (Factory name: DC8W8SA00LF)

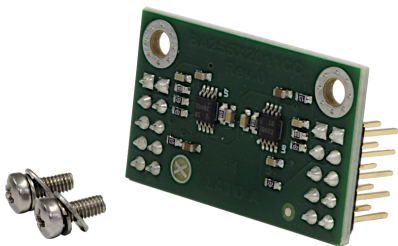

Parallel channel Module: Used to connect the channels in parallel (couples CH0-CH1, CH2-CH3, CH4-CH5, CH6-CH7).

**This document, or parts thereof, may not be reproduced in any form or by any means without written permission from Caen S.p.A. Although every effort has been made to ensure the accuracy of information presented in this catalog, Caen S.p.A reserves the right to modify its products specifications without giving any notice; for up to date information please visit [www.caen.it](http://www.caen.it) © Caen S.p.A - 2024**

**CAEN S.p.A.**

Via Vetraia 11  
55049 - Viareggio  
Italy

**Phone +39.0584.388.398**

**Fax +39.0584.388.959**

**info@caen.it**

**www.caen.it**

**CAEN GmbH**

Brunnenweg 9  
64331 Weiterstadt, Germany

**Phone +49 (0)212.254.4077**

**Mobile +49 (0)151.16.548.484**

**info@caen-de.com**

**www.caen-de.com**

**CAEN Technologies, Inc.**

1 Edgewater Street - Suite 101  
Staten Island, NY 10305  
USA

**Phone +1.718.981.0401**

**Fax +1.718.556.9185**

**info@caentechnologies.com**

**www.caentechnologies.com**

**CAENspa India Private Limited**

B205, BLDG42, B Wing,  
Azad Nagar Sangam CHS,  
Mhada Layout, Azad Nagar, Andheri West  
Mumbai, Maharashtra 400053, India

**info@caen-india.in**

**www.caen-india.in**

