


N605

4 Channel 200 MHz Constant Fraction Discriminator



Features

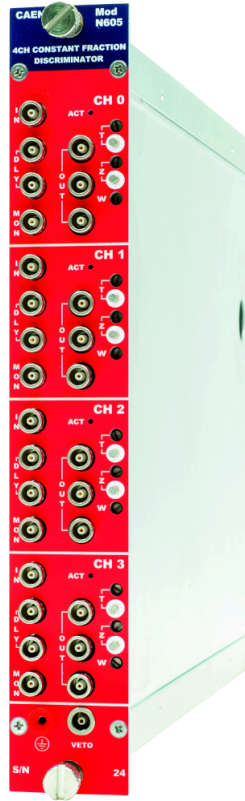

- Four independent Constant Fraction Discriminators for fast detectors with sub-ns rise time
- Independently adjustable discriminators parameters (T, W, Z)
- Double pulse resolving time down to 4 ns
- Fine threshold adjustment from -15 to -1000 mV
- Fine walk correction with zero-crossing adjustment
- Exceptional low walk jitter < 50 ps
- Adjustable output signal width
- CFD monitor output
- Common veto input and individual gates for coincidence or anticoincidence options

Description

The CAEN **Mod. N605** houses four independent 20% Constant Fraction Discriminators (CFD) **in 1-unit wide NIM**. The module is intended for high resolution time measurements, where fast signals with rise time as low as 0.8 ns are involved. Those may involve the use of radiation detectors made of fast scintillators, PMT, microchannel plates and fast semiconductor detectors.

The module guarantees exceptional low walk jitter, lower than 50 ps, for signals spreading over a wide range of amplitude, from -5 V to -50 mV.

The unit is provided with independent threshold discriminators to reject signal baseline noise. Front panel test point and screwdriver permits the precise measurement of the threshold, in the range from -15 mV down to -1 V. Each channel can be adjusted for the zero crossing level of the discriminator to minimize the time walk. Moreover the N605 has a CFD signal monitor output connector on the front panel to facilitate the correct adjustment of the working parameters.

Each channel has a fan-out of three timing output signals provided with NIM standard. The outputs can be selected to operate both in blocking and updating mode: the first is intended to minimize multiple triggering when slow scintillators are used, while the second is intended to reduce dead time in event of high rate condition. The board is provided with fast VETO input and individual GATE inputs to operate coincidence or anticoincidence logic conditions with the timing signal.

Technical Specifications

Packaging

1U-wide NIM unit

Input Channels

4 inputs (negative polarity, 50 Ω impedance)

Input linear range

-20 mV \div -5 V

Max input amplitude

-10V

Max input frequency

250 MHz

Threshold range

-15 mV \div -1 V

Output width

From 2 ns to 500 ns (jumper setting)

Output rise time

< 600 ps

Output fall time

< 950 ps

Walk

< \pm 30 ps on -50 mV \div -5 V input with 2.5 ns rise/fall time
< \pm 25 ps on -50 mV \div -2 V input with 1.6 ns rise/fall time

Constant Fraction

0,2

Double Pulse Resolution

< 4 ns

Transmission Delay

Typically < 7 ns with 3 ns external delay

Operating Temperature Range

0 to 50°C.

Transmission delay Temperature Sensitivity

< ± 10 ps/°C from 0 to 50°C.

Ordering Options

Code	Description	
WN605XAAAAAA	N605 - 4 Channel 200 MHz Constant Fraction Discriminator	RoHS

Related Products

NIM8304



7U 12 slot smart fan unit Switching 2000 W Crate

NIM8303



5U 12 slot 300/600 W Crate

NIM8302P




5U 5 slot 150 W Portable Crate

NIM8306



2 Slot Switching 750 W Mini Crate

NIM8302




5U 10 slot 150 W Compact Crate

NIM8305



2 Slot Switching 450 W Mini Crate

Gallery

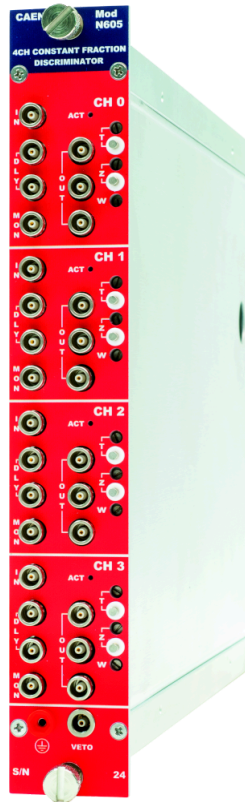

This document, or parts thereof, may not be reproduced in any form or by any means without written permission from Caen S.p.A. Although every effort has been made to ensure the accuracy of information presented in this catalog, Caen S.p.A reserves the right to modify its products specifications without giving any notice; for up to date information please visit www.caen.it © Caen S.p.A - 2024

CAEN S.p.A.

Via Vetraia 11
55049 - Viareggio
Italy

Phone +39.0584.388.398

Fax +39.0584.388.959

info@caen.it

www.caen.it

CAEN GmbH

Brunnenweg 9
64331 Weiterstadt, Germany

Phone +49 (0)212.254.4077

Mobile +49 (0)151.16.548.484

info@caen-de.com

www.caen-de.com

CAEN Technologies, Inc.

1 Edgewater Street - Suite 101
Staten Island, NY 10305
USA

Phone +1.718.981.0401

Fax +1.718.556.9185

info@caentechnologies.com

www.caentechnologies.com

CAENspa India Private Limited

B205, BLDG42, B Wing,
Azad Nagar Sangam CHS,
Mhada Layout, Azad Nagar, Andheri West
Mumbai, Maharashtra 400053, India

info@caen-india.in

www.caen-india.in

